


RTD 105 - RTD Assembly with Adjustable Connection

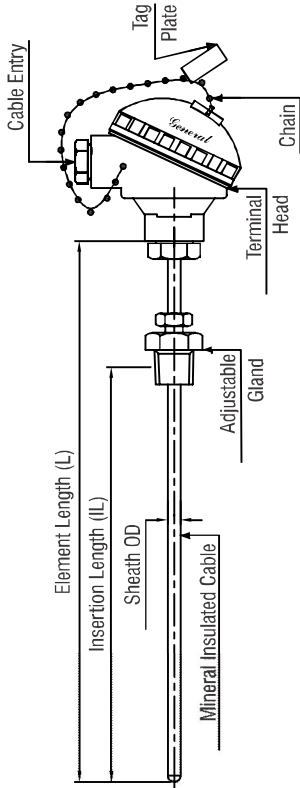

Other Options	
0	None
1	Cable Gland (Specify MOC [S4,S6,Brass])
2	Plug (Specify MOC [AI,SS304,SS316])
3	Head Mounted transmitter
4	CE Certification
5	Only Base Plate Suitable for TT
6	6 Pin / 10 Pin Connector
7	Special
8	'L' Type Mounting Bracket
9	Thermowell

NOTE: Adjustable Gland Length - 50 mm
(L=IL + 50 mm Below Head)

RTD - 105

Element	1	Pt. 100
	2	Pt. 1000
	XXX	Please Specify
Element Type	1	Simplex
	2	Duplex
Wire Configuration	2W	2-Wire
	3W	3-Wire
	4W	4-Wire
Calibration Standard	IEC	IEC 751
	DIN	DIN 43760
Calibration Class	A	Class A
	B	Class B
Sheath 'OD'	3	3 mm
	4.5	4.5 mm
	6	6 mm
	8	8 mm
	10	10 mm
	XXX	Please Specify
Sheath Material	S6S	SS316
	S6L	SS316L
	XXX	Please Specify
Terminal Head	AI	Die cast Aluminium
	S4S	SS304
	S6S	SS316
No. of Cable Entries	1	Single
	2	Double
Cable Entry (F)	15N	1/2" NPT
	20E	3/4" ET
	15M	M20 x 1.5
	15B	1/2" BSP
Head Type	H1	Weatherproof IP-65
	H2	Weatherproof IP-67
	H3	Flameproof, IP-67, Gr IIA,IIB
	H4	Explosionproof, IP-67, Gr IIC
	H5	ATEX
Adj. Gland MOC	S4S	SS304
	S6S	SS316
Connection Fitting	15N	1/2" NPT
	15B	1/2" BSP
	XXX	Please Specify
Insertion Length of "IL" (mm)	Pl. Specify in mm	